










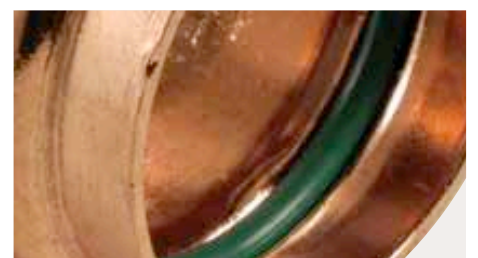




>B< Press Solar fitting is an innovative press system which provides a more secure fitting for solar applications.

Features and Benefits:

- Available in copper and red brass fittings.
 - Compatible with various press tools and jaws.*
 - >B< Press Solar is quick and simple to install, saving time and money.
 - Flame free installation for ensuring on site safety.
 - >B< Profile 3 point press ensures a leak free, secure and permanent joint.
 - Available in 15mm to 28mm.
 - Suitable for use with hard, half-hard and soft copper tubes to EN 1057.
 - Manufactured and designed to BS 8537 copper tube press fittings.
 - Designed with a mechanical hexagonal press form which indicates fittings has been secured ensuring no joint rotation.
 - >B< Press Solar has a high quality O-Ring material that forms a secure leak free joint when pressed.
 - Leading edge design ensures the chances of damaging the O-Rings are reduced during installation.
- *Please see compatibility list on website for more details



>B< Press Solar range with Press Indicators

<p>Straight Coupler</p>  <p>PH1 (PH5270) From: 15mm To: 28mm</p>	<p>Fitting Reducer</p>  <p>PH6 (PH5243) From: 22 x 15mm To: 28 x 22mm</p>	<p>Female Straight Connector</p>  <p>PH2 (PH4270G) From: 15 x 1/2" To: 22 x 1"</p>	<p>Male Straight Connector</p>  <p>PH3 (PH4243G) From: 15 x 1/2" To: 28 x 1"</p>	<p>Elbow</p>  <p>PH12 (PH5002) From: 15mm To: 28mm</p>
<p>Street Elbow</p>  <p>PH12S (PH5001) From: 15mm To: 28mm</p>	<p>45° Elbow</p>  <p>PH21 (PH5041) From: 15mm To: 28mm</p>	<p>45° Street Elbow</p>  <p>PH21S (PH5040) From: 15mm To: 28mm</p>	<p>Equal Tee</p>  <p>PH24 (PH5130) From: 15mm To: 28mm</p>	<p>Tee - Reduced Branch</p>  <p>PH25 (PH5130) From: 22 x 22 x 15mm To: 22 x 28 x 22mm</p>
<p>Straight Union Connector</p>  <p>PH69F (PH4330G) From: 15 x 1/2" To: 22 x 1"</p>	<p>Tee - Female Threaded</p>  <p>PH30 (P4330G) From: 15 x 15 x 1/2" To: 22 x 1/2 x 22"</p>	<p>Female Straight Union Connector</p>  <p>PH69F (PH4330G) From: 15 x 1/2" To: 22 x 1"</p>	<p>Connector with Flat Face</p>  <p>PH4355 From: 15 x 3/4" To: 22 x 1"</p>	

- Specially designed FKM O-Ring making >B< Press Solar suitable for Solar and medium temperature HVAC applications including district heating systems.
- Available in sizes 15 - 28mm; other sizes available on request.
- Designed for solar pressure up to 10 bar.
- Designed for temperature ranges of -15°C to 140°C with short term excursions to 230°C (glycol:water 50:50).
- Fully tested to 40 bar pressures and approved by SPF (Solartechnik Prüfung Forshung) Switzerland.
- Patented design.

*Conex|Bänninger products are approved by numerous Standards Authorities and Certification Bodies. For more details on this product range, please email our technical team at: technical@ibpgroup.com.

Conex Universal Limited: Global House, 95 Vantage Point, The Pensnett Estate, Kingswinford, West Midlands DY6 7FT, UNITED KINGDOM.
Tel: +44 (0)121 557 2831 | Fax: +44 (0)121 557 0185 | Email: sales@ibpgroup.com | Website: www.conexbanninger.com

This is a representation of the full range from Conex Universal. IBP trade marks are registered in numerous countries.