










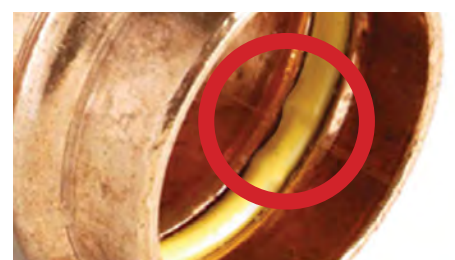











>B< Press Gas fitting is an innovative press system which provides a secure fitting for gas applications.

#### Features and Benefits:


- Available in copper and red brass fittings.
  - Compatible with various press tools and jaws.\*
  - >B< Press Gas is quick and simple to install, saving time and money.
  - Flame free installation for ensuring on-site safety.
  - >B< Profile 3 point press ensures a leak free, secure and permanent joint.
  - Available in 15mm to 54mm.
  - Suitable for use with hard, half-hard and soft copper tubes to EN 1057.
  - Manufactured and designed to BS 8537 copper tube press fittings.
  - Designed with a mechanical hexagonal press form which indicates fittings has been secured ensuring no joint rotation.
  - >B< Press Gas has a high quality O-Ring material that forms a secure leak free joint when pressed.
  - Leading edge design ensures the chances of damaging the O-Rings are reduced during installation.
- \*Please see compatibility list on website for more details



## >B< Press Gas range with Pressing Indicator

<p><b>Straight Coupler</b></p>  <p><b>PG1 (P5270)</b> From: 15mm To: 54mm</p>	<p><b>Slip Coupler</b></p>  <p><b>PG1S (P4275)</b> From: 15mm To: 54mm</p>	<p><b>Female Straight Connector</b></p>  <p><b>PG2 (P4270G)</b> From: 15 x 1/2" To: 54 x 2"</p>	<p><b>Male Straight Connector</b></p>  <p><b>PG3 (P4243G)</b> From: 15 x 1/2" To: 54 x 2"</p>	<p><b>Fitting Reducer</b></p>  <p><b>PG6 (P5243)</b> From: 22 x 15mm To: 54 x 42mm</p>
<p><b>90° Elbow</b></p>  <p><b>PG12 (PC5002)</b> From: 12mm To: 108mm</p>	<p><b>90° Street Elbow</b></p>  <p><b>PG12S (P4001G)</b> From: 15mm To: 54mm</p>	<p><b>90° Bend with Male Thread</b></p>  <p><b>PG13 (P4001G)</b> From: 15 x 1/2" To: 54 x 2"</p>	<p><b>90° Elbow with Female Thread</b></p>  <p><b>PG14 (P4090G)</b> From: 15 x 1/2" To: 54 x 2"</p>	<p><b>45° Obtuse Elbow</b></p>  <p><b>PG21 (P5041)</b> From: 15mm To: 54mm</p>
<p><b>45° Obtuse Elbow</b></p>  <p><b>PG21S (P5040)</b> From: 15mm To: 54mm</p>	<p><b>90° Street Bend</b></p>  <p><b>PG21S (P5001)</b> From: 15mm To: 108mm</p>	<p><b>45° Obtuse Street Elbow</b></p>  <p><b>PG24 (P5130)</b> From: 15mm To: 54mm</p>	<p><b>Tee Reduced Branch</b></p>  <p><b>PG25 (P5130)</b> From: 22 x 15 x 22mm To: 54 x 42 x 54mm</p>	<p><b>Tee Reduced End</b></p>  <p><b>PG26 (P5130)</b> From: 22 x 15 x 22mm To: 28 x 22 x 28mm</p>
<p><b>Tee Reduced End &amp; Branch</b></p>  <p><b>PG27 (P5130)</b> From: 22 x 15 x 15mm To: 54 x 42 x 42mm</p>	<p><b>Tee Reduced End &amp; Branch</b></p>  <p><b>PG30 (P4130)</b> From: 15 x 1/2 x 15mm To: 54 x 1/2 x 42mm</p>	<p><b>Stop End</b></p>  <p><b>PG61 (P5301)</b> From: 15mm To: 108mm</p>		

- Specially designed EPDM O-Ring making >B< Press suitable for HVAC and potable hot and cold water applications, compressed air oil free and chilled water 15°.
- Designed for hydrostatic water pressure up to 16 bar.
- Designed for temperature ranges of -35°C to 110°C.
- Fully tested to 64 bar pressures and approved by WRAS, KIWA and DVGW.
- Designed and manufactured to BS.8537:2010.



\*Conex | Bänninger products are approved by numerous Standards Authorities and Certification Bodies. For more details on this product range, please email our technical team at: [technical@ibpgroup.com](mailto:technical@ibpgroup.com).

**Conex Universal Limited:** Global House, 95 Vantage Point, The Pensnett Estate, Kingswinford, West Midlands DY6 7FT, UNITED KINGDOM.  
Tel: +44 (0)121 557 2831 | Fax: +44 (0)121 557 0185 | Email: [sales@ibpgroup.com](mailto:sales@ibpgroup.com) | Website: [www.conexbanninger.com](http://www.conexbanninger.com)

This is a representation of the full range from Conex Universal. IBP trade marks are registered in numerous countries.

an IBP GROUP company